

PLAN ON

Gatorshield® tubing for trailer construction



Frame



Tongue Tube



Axle



Winch




Guide Tube

1.800.882.5543 www.alliedtube.com

Flo-Coat, Gatorshield and Tyco are either registered trademarks or trademarks of Tyco and/or its affiliates in the United States and/or other countries. All other brand names, product names, or trademarks belong to their respective owners.

 **allied**
TUBE & CONDUIT

Why specify Allied Gatorshield® tubing for trailer construction?

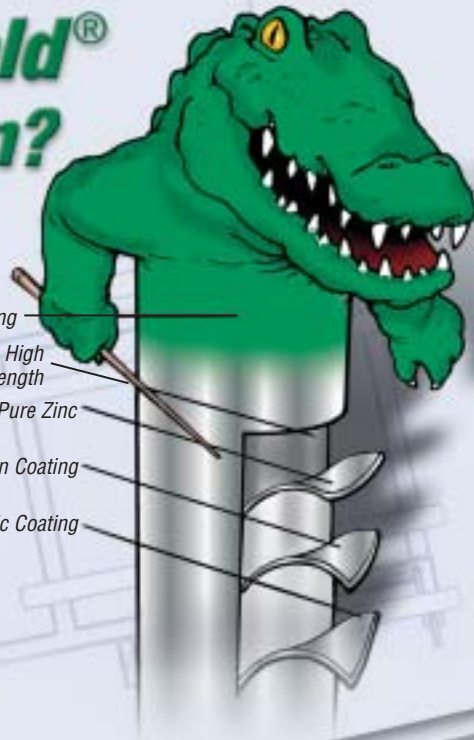

PRODUCT BENEFITS:

- Superior strength 50,000 minimum PSI Yield/55,000 minimum PSI Tensile
- Superior corrosion resistance with in-line hot-dip galvanizing process
- Excellent match to any aluminum trailer frame

TIME AND COST SAVING BENEFITS FOR AXLE AND TONGUE TUBE:

- Eliminates need to paint or powder coat after welding; no production line back-ups
- Eliminates expense and labor of adding caps to protect spindles from hot dipping or painting
- Organic topcoat acts as a primer for easy painting

UNIQUE, IN-LINE FLO-COAT® PROCESS:

- Interior Corrosion Resistant Coating
- Cold-Formed Steel Providing High Yield/High Tensile Strength
- 99.99% Pure Zinc
- Conversion Coating
- Clear Organic Coating

SALT SPRAY TESTS:

(Number of hours until first sign of red rust)

192	480	576	744	840	2016
<i>Pregalvanized G-60</i>	<i>Pregalvanized G-90</i>	<i>Hot-Dip Schedule 40 Pipe</i>	<i>Competitive Triple-Coat Product</i>	<i>Allied Zinc Flo-Coat® Tubing</i>	<i>Allied Gatorshield® Tubing</i>

Tests conducted by Scientific Control Labs. Test results available upon request.

CORROSION RESISTANCE

Allied's galvanized steel tubing receives a triple-layer of corrosion protection. First, 99.99% pure zinc bonds to the tube, and is followed by a conversion coating. The third coating is a clear organic topcoat which "seals" the surface. The result is a smooth, shiny end product that is unmatched in terms of strength and durability.

SIZE RANGE

- Round: 1/2" - 5", 22 ga to 1/4" wall thickness
- Square: 5/8" to 4", 20 ga to 1/4" wall thickness
- Rectangle: 5/8" x 1 1/8" to 3" x 4", 20 ga to 1/4" wall thickness
- Oval: 1" x 1/2" to 3 x 5.3", 20 ga to 7 ga

Distributed by:

tyco
Electrical &
Metal Products

16100 S. Lathrop Ave.
Harvey, IL 60426
Telephone: 1.800.882.5543
www.alliedtube.com